KLIC-7003 Li-ION Battery

Effective: January 2007

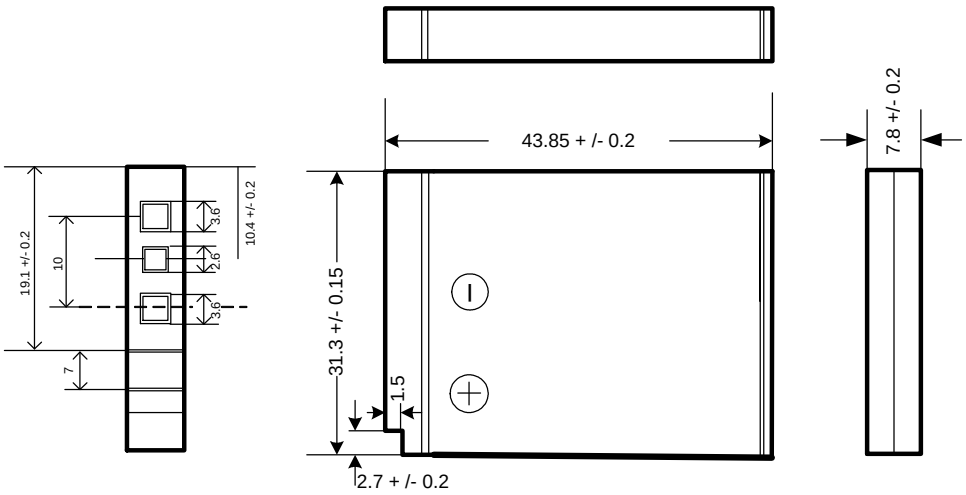

System:	**Li-ION**
Designation:	**ANSI/IEC**
Nominal Voltage:	**3.7 Volts**
Capacity:	**1050 mAh Nominal**
End Voltage:	**3.Volts**
Charging Current:	**1050 mA**
Charging Voltage:	**4.2 + or – 1% VDC**
Discharger Current (Std):	**1050mA**
Discharger Current (Max):	**1.24A**
Charging Cycles:	**Up to 300**
Internal Resistance:	**160 mOhm**
Temperature Range:	**0°C to +50°C Operating** **-20°C to +30°C Storage** **0°C to +40°C Charging**
Approx. Weight:	**17.5 grams**
Volume:	**6.5 cm^3**
Terminals:	**Flat Contacts**
Jacket:	**Plastic Housing, Film Label**

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact
Eastman Kodak Company
343 State Street
Rochester NY 14650-0811
1-800-242-2424
www.kodak.com/go/batteries

© Eastman Kodak Company, 2006 Kodak is a trademark.